

**6/10**  
**AND**  
**10/10**

**USER MANAGER  
MANUAL**


Installer: \_\_\_\_\_

Tel: \_\_\_\_\_

After Hours: \_\_\_\_\_

## Accessing The Manager Menu


The following diagram shows the user menu with integral manager menu.

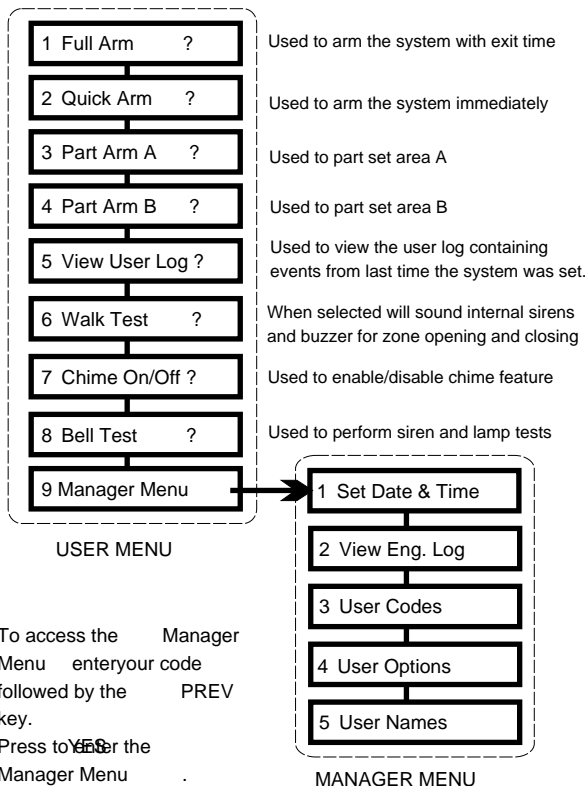

Please refer to the back page for Using the Manager Menu.

Set Date & Time
View Eng. Log
User Codes
User Options
User Names

→ To access the Set Date&Time menu enter your code followed by the key **PREV** twice.




Enter the new date and time. The and keys **PREV** **NEXT** can be used to skip over characters. Please note that time is entered in 24Hr format.

Press the key **QUIT** to exit the manager menu.

Set Date & Time
View Eng. Log
User Codes
User Options
User Names

→ To access the View Eng. Log menu enter your code followed by the key **PREV** once. Press for **NEXT** **YES**



The log is displayed with an event number followed by the type of even. Additional information can also be displayed relating to the event and the date and time that it occurred. The log can contain up to 100 events with the most recent event having event number 001.

To get additional information on the event press the key.

**YES**

Subsequently pressing the key will move back through events in the log.

If no key is pressed within 5 seconds the display will be automatically updated with information on the current event.

Press the key **QUIT** to exit the manager menu.


## Using The Manager Menu

The manager menu is part of the user menu and can only be accessed with codes that have the manager option enabled. Please check with your installer that you have this option enabled.

Menus can also be accessed using quick keys. Each menu item has an associated quick key numbered 1 to 9. Pressing a key will automatically enter that menu E.g. Entering your code followed by keys 9 & 2 will access the menu View Eng. Log . Please refer to for accessing The Manager Menu quick keys highlighted beside each menu item.

In the user and manager menus keypad keys have different functions. These are highlighted below....

### MENU KEYS



#### QUIT

Used to exit a menu.

#### YES

Used to enter a menu or enable an option.

#### NO

Used to disable an option.

#### PREV

Used to move to the PREVIOUS item in a menu.

#### NEXT

Used to move to the NEXT item in a menu.

#### COPYRIGHT

© HKC Ltd. All Rights reserved. No part of this publication may be reproduced, transmitted, stored in a retrieval system or translated in another language in any form or by any means - electronic, mechanical or otherwise without the prior written permission of HKC Ltd.

#### DISCLAIMER

HKC Ltd. makes no representations or warranties with respect to the contents hereof and specifically disclaim any implied warranties of merchantability or fitness for any particular purpose. Further, HKC Ltd. reserve the right to revise this publication and to make changes from time to time in the contents hereof without obligation of HKC Ltd. to notify any person of such revision.

Please note that keys 0 and 9 have additional characters not highlighted on the keys in text edit mode i.e.



yzYZ /&9




Space , ' : - 0

EXAMPLE: Changing the text for User 1 (U1) to

Homer

Select User 1 in the menu **Using Names** keys and press . YES

PREV NEXT



NO →  
Delete existing text



'H' is located on the 3 key.  
Pressing once will give 'g' twice will give 'h' etc.  
Press the 3 key five times to get 'H'

3 x 5  
ghi




Press the key **NEXT** move onto the next character to be inserted.

NEXT

'o' is located on the 5 key. Pressing once will give 'm' twice will give 'n' etc.  
Press the 5 key three times to get 'o'.

5 x 3  
mno




Press the key **NEXT**

NEXT

'm' is located on the 5 key.  
Pressing once will give 'm'.  
Press the 5 key once to get 'm'.

5 x 1  
mno




Press the key **NEXT**

NEXT


'e' is located on the 2 key. Pressing once will give 'd' twice will give 'e' etc.  
Press the 2 key twice to get 'e'.

2 x 2  
def



Press the key **NEXT**

NEXT



Enter remaining letters in name and press the key **YES** accept the new text.

Set Date & Time
View Eng. Log
User Codes
<b>User Options</b>
User Names

The user options menu allows options to be selected for each individual user.

Select a user using the or PREV NEXT keys then press YES.

View the option to change using the PREV NEXT key.

Enable the option using the key. YES

Disable the option using the key. NO

The following options are available....


U1 Full Set	YES	Enables user to set the system
U1 Unset	YES	Enables user to unset the system
U1 Inhibit	YES	Enables user to inhibit zones or tampers
U1 PartSet A	YES	Enables user to part set area A
U1 PartSet B	YES	Enables user to part set area B
U1 User Menu	NO	Disables this user from the user menu when entering a code when the system is unset.
U1 Man.Menu	NO	Disables access to the manager menu for this user.

Press the key **QUIT** times to exit from this Menu .

Manager

#### NOTE:

Enabling the option **Manager Menu** will automatically enable the User Menu option. This will require the user to arm the system using the Menu .

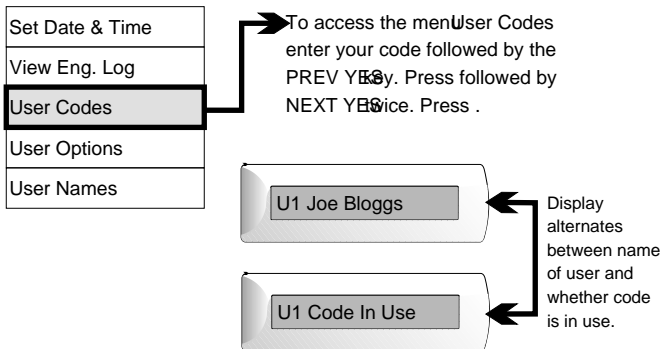


This menu is used to program codes for users 1 to 4. Each code is required to be 4-6 digits in length. The digit 0 is not allowed and codes cannot end with the number 9. New codes must be verified in order to be accepted.

Press the key **QUIT** to exit the menu      User Code      .

**NOTE:**

To delete a code for a user from the system press the key without YES entering any code digits when prompted for a new code. Repeat for code verification. The code will be removed from the system

---

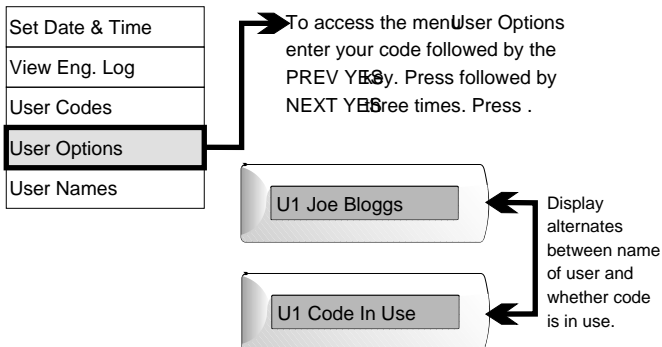

Set Date & Time
View Eng. Log
User Codes
User Options
<b>User Names</b>

➔ To access the menu User Names enter your code followed by the PREV key. Press followed by YES.

This menu is used to change the text for a user name which can contain up to 12 characters. In text edit mode the numeric keys have text associated with them which is indicated below the number on the key. Each key has up to 7 characters associated with it.

In general the sequence of characters follows the following format - lower case characters, upper case characters followed by the key number E.g. for key 2 this is defDEF2, for key 8 this is vwvVWX8.

Also in this mode the menu navigation keys have the following functions....

